

# FENDT NF COOLANT 50

**SUPER HIGH PERFORMANCE COOLANT PREMIX ANTIFREEZE COOLANT BASED ON MONO ETHYLENE GLYCOL, FREE OF NITRITE, AMINE AND PHOSPHATE.**

Fendt NF Coolant 50 is an antifreeze coolant based on mono ethylene glycol. It provides reliable protection against damages caused by cavitation, frost, corrosion and overheating for both modern passenger car and heavy duty engines.

## Applications

AGCO approved for use in the following applications:

- All Fendt Tractors fitted with DEUTZ Engines
- All AGCO Brands not requiring Low – Silicate formulation or CAT EC-1 specification

Suitable for a large range of other machinery brands and applications including:

- Passenger Cars
- Light Commercial Vehicles
- Agricultural Machinery
- Construction and Mining Machinery

## Benefits and Advantages

- Ready to use.
- Extended drain intervals.
- Perfect for engines, cylinder heads and radiators made from aluminium.
- Universal usability (passenger cars, truck and stationary engines).
- Protection from deposits, cavitation and corrosion.

## Specifications

Recommended for use where the following specifications are required:


- ASTM D 3306 TYPE 3
- ASTM D 4985
- AFNOR NF R 15-601 TYPE 3
- BS 6580
- DEUTZ DQC CA-14

**Blended in Australia.**

**Contains: Ethylene glycol 532 g/L.**

**Fendt NF Coolant 50 is a fully formulated ready to use 50% coolant premix.**

Do not pollute drains, soil or water with used products. After use, dispose of container in a responsible manner. Do not dispose of to land fill. Disposal of container should comply with local council regulations.

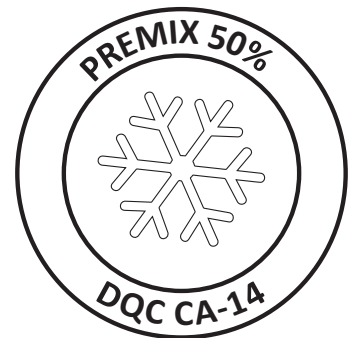

**Recommendations**

- CATERPILLAR EC-1
- CUMMINS CES 14603
- CASE MS 1710
- FREIGHTLINER 48-2288D
- KENWORTH RO26-170-97
- MAN 324 N
- NEW HOLLAND WSN-M97B18-D
- PACCAR CS 0185

**Characteristics**

Specific gravity @ 20°C	DIN 51757	1.07 g/ml
Colour	DIN ISO 2049	Yellow/green
Flash Point COC	ASTM D 1120	>160 °C
Boiling Point	ASTM D 1120	>132 °C
pH-value	DIN 51 369	8.0 N/A

Remember to always follow the manufacturers lubrication specification guidelines.

For more product safety information refer to the latest Safety Data Sheet available from AGCO Australia Limited Parts Customer Service Team. Avoid release into the environment. Dispose of container and contents according to all Federal and State Laws and Regulations.